

## **DRISTEEM**° 1-800-328-4447


## Rapid-Sorb VERTICAL AIR FLOW INSTALLATION SPECIFICATIONS (HEADER OUTSIDE)

## CONFIDENTIAL

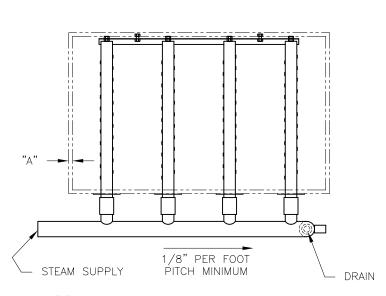

PLAN VIEW



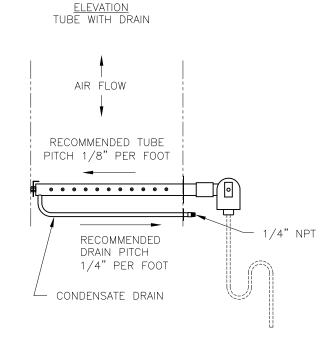

"A"= WALL OR INSULATION THICKNESS NOTE: HEADER CAPACITIES AND PITCH (1/8" PER FOOT) REQUIREMENTS WILL NOT CHANGE.

HEADER DIA.	CAPACITY	
2"	250 #/HR	
3"	500 #/HR	
4"	800 #/HR	
5"	1300 #/HR	
6"	2100 #/HR	

SEE OM-609 FOR ADDITIONAL ORDER INFORMATION

TUBE DIA.	W/O CONDENSATE* DRAIN		WITH CONDENSATE* DRAIN	
	INSULATED	NONINSULATED	INSULATED	NONINSULATED
1 1/2"	29 #/HR	28 #/HR	65 #/HR	62 #/HR
2"	65 #/HR	62 #/HR	97 #/HR	93 #/HR

<sup>\*</sup> FACE HEIGHTS OF LESS THAN 26" MAY HAVE REDUCED TUBE CAPACITIES. CONTACT DRISTEEM

С	10/25/1	1 EC# 5554
В	11/3/09	9 EC# 4960
Α	2/5/02	EC# 7577
REV	DATE	RECORD
DATE: 1-8-92 DWG: OM-7577		