


CRUV™ EVAPORATIVE HUMIDIFIER
WIRING DIAGRAM W/LW417


DATE	REV	RECORD	DR
3/14	F	E.C.# 6238	JK
4/17	G	E.C.# 6551	JK
4/21	H	E.C.# 6969	JK

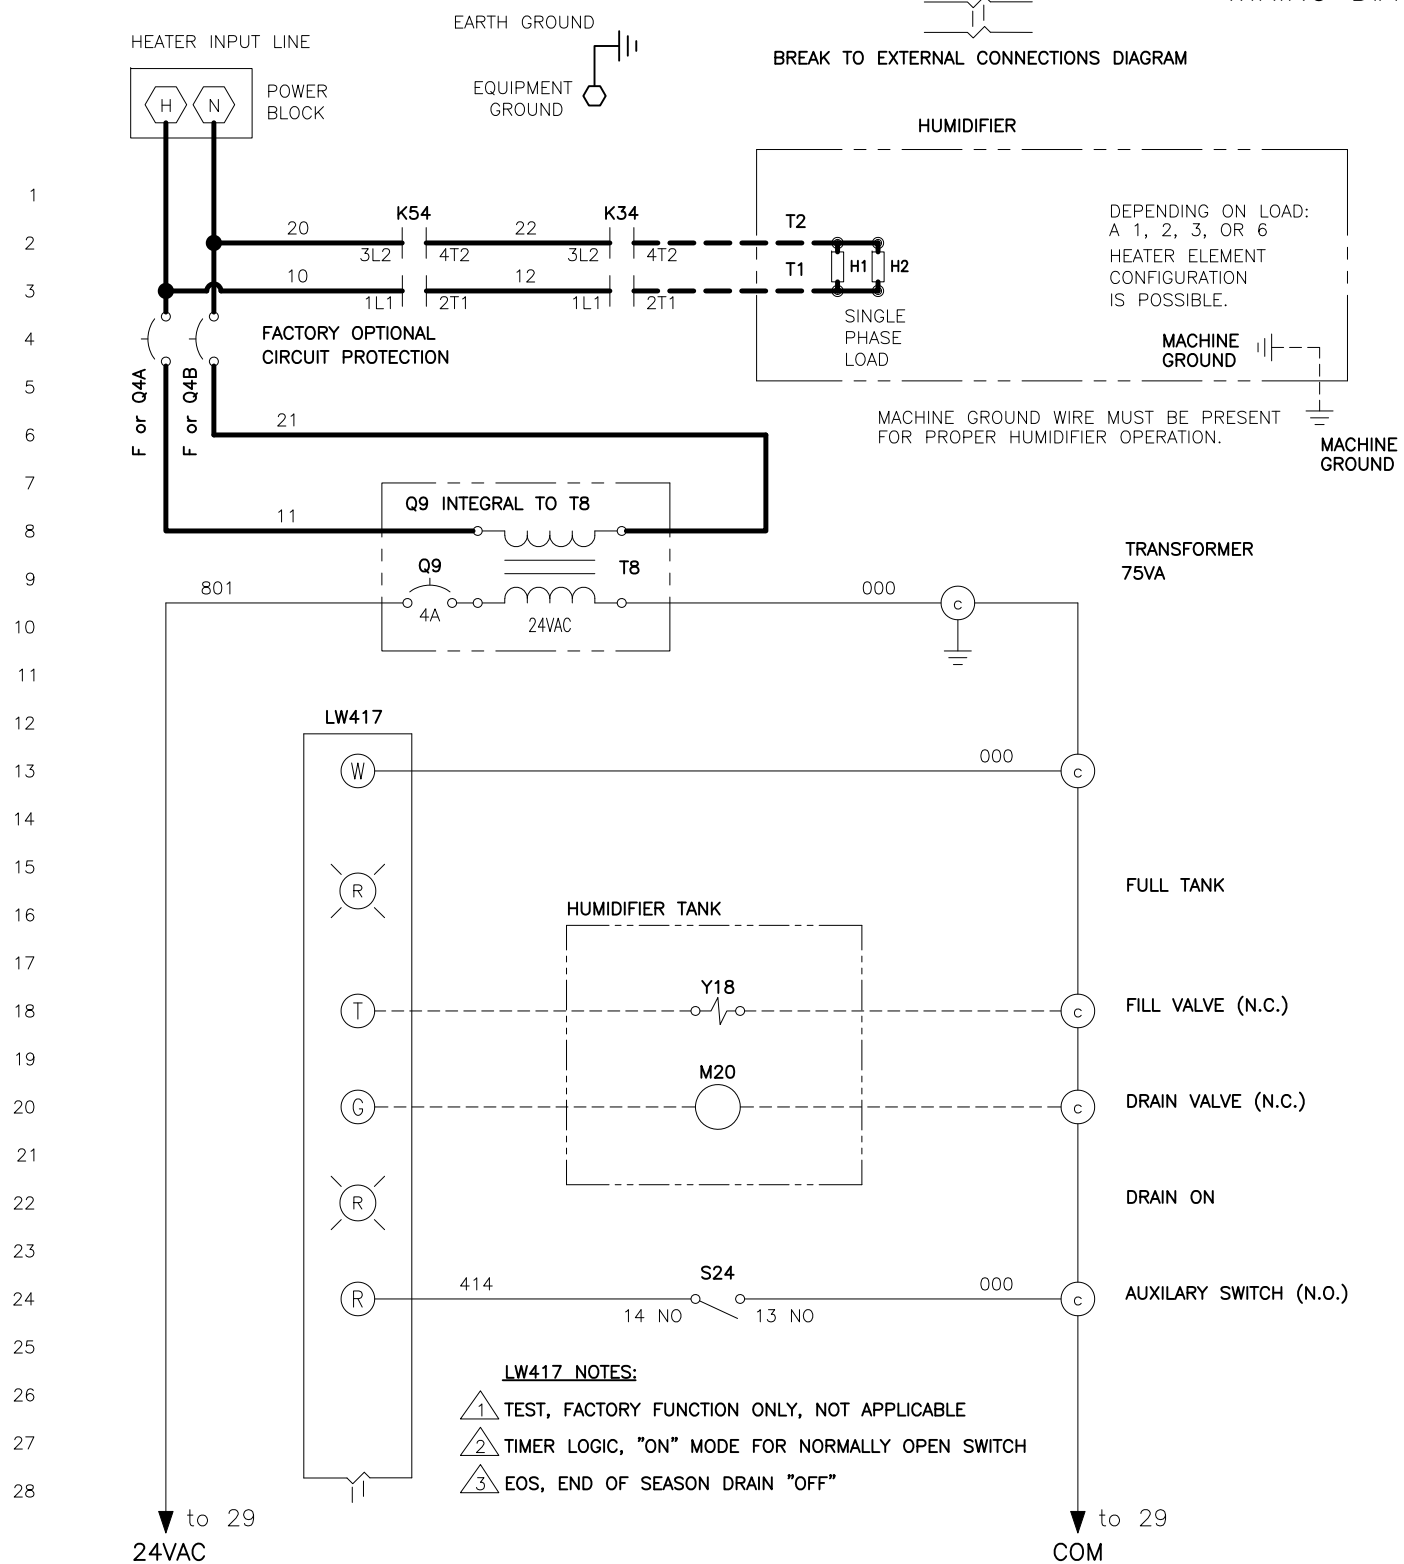

5 AUTO-DRAIN SETTINGS TABLE

	SWITCH 1	SWITCH 2	SWITCH 3	DRAIN TIME	INTERVAL TIME
SELF TEST	OFF	OFF	OFF	10 MIN.	2 MIN.
DISABLED	ON	OFF	OFF	-----	-----
OPTION	OFF	ON	OFF	10 MIN.	20 HRS
OPTION	ON	ON	OFF	30 MIN.	20 HRS
FACTORY SETTINGS	OFF	OFF	ON	10 MIN.	40 HRS
OPTION	ON	OFF	ON	30 MIN.	40 HRS
OPTION	OFF	ON	ON	10 MIN.	80 HRS
OPTION	ON	ON	ON	30 MIN.	80 HRS

NOTE:
4. REFER TO CRUV ELECTRICAL DATA SHEET.

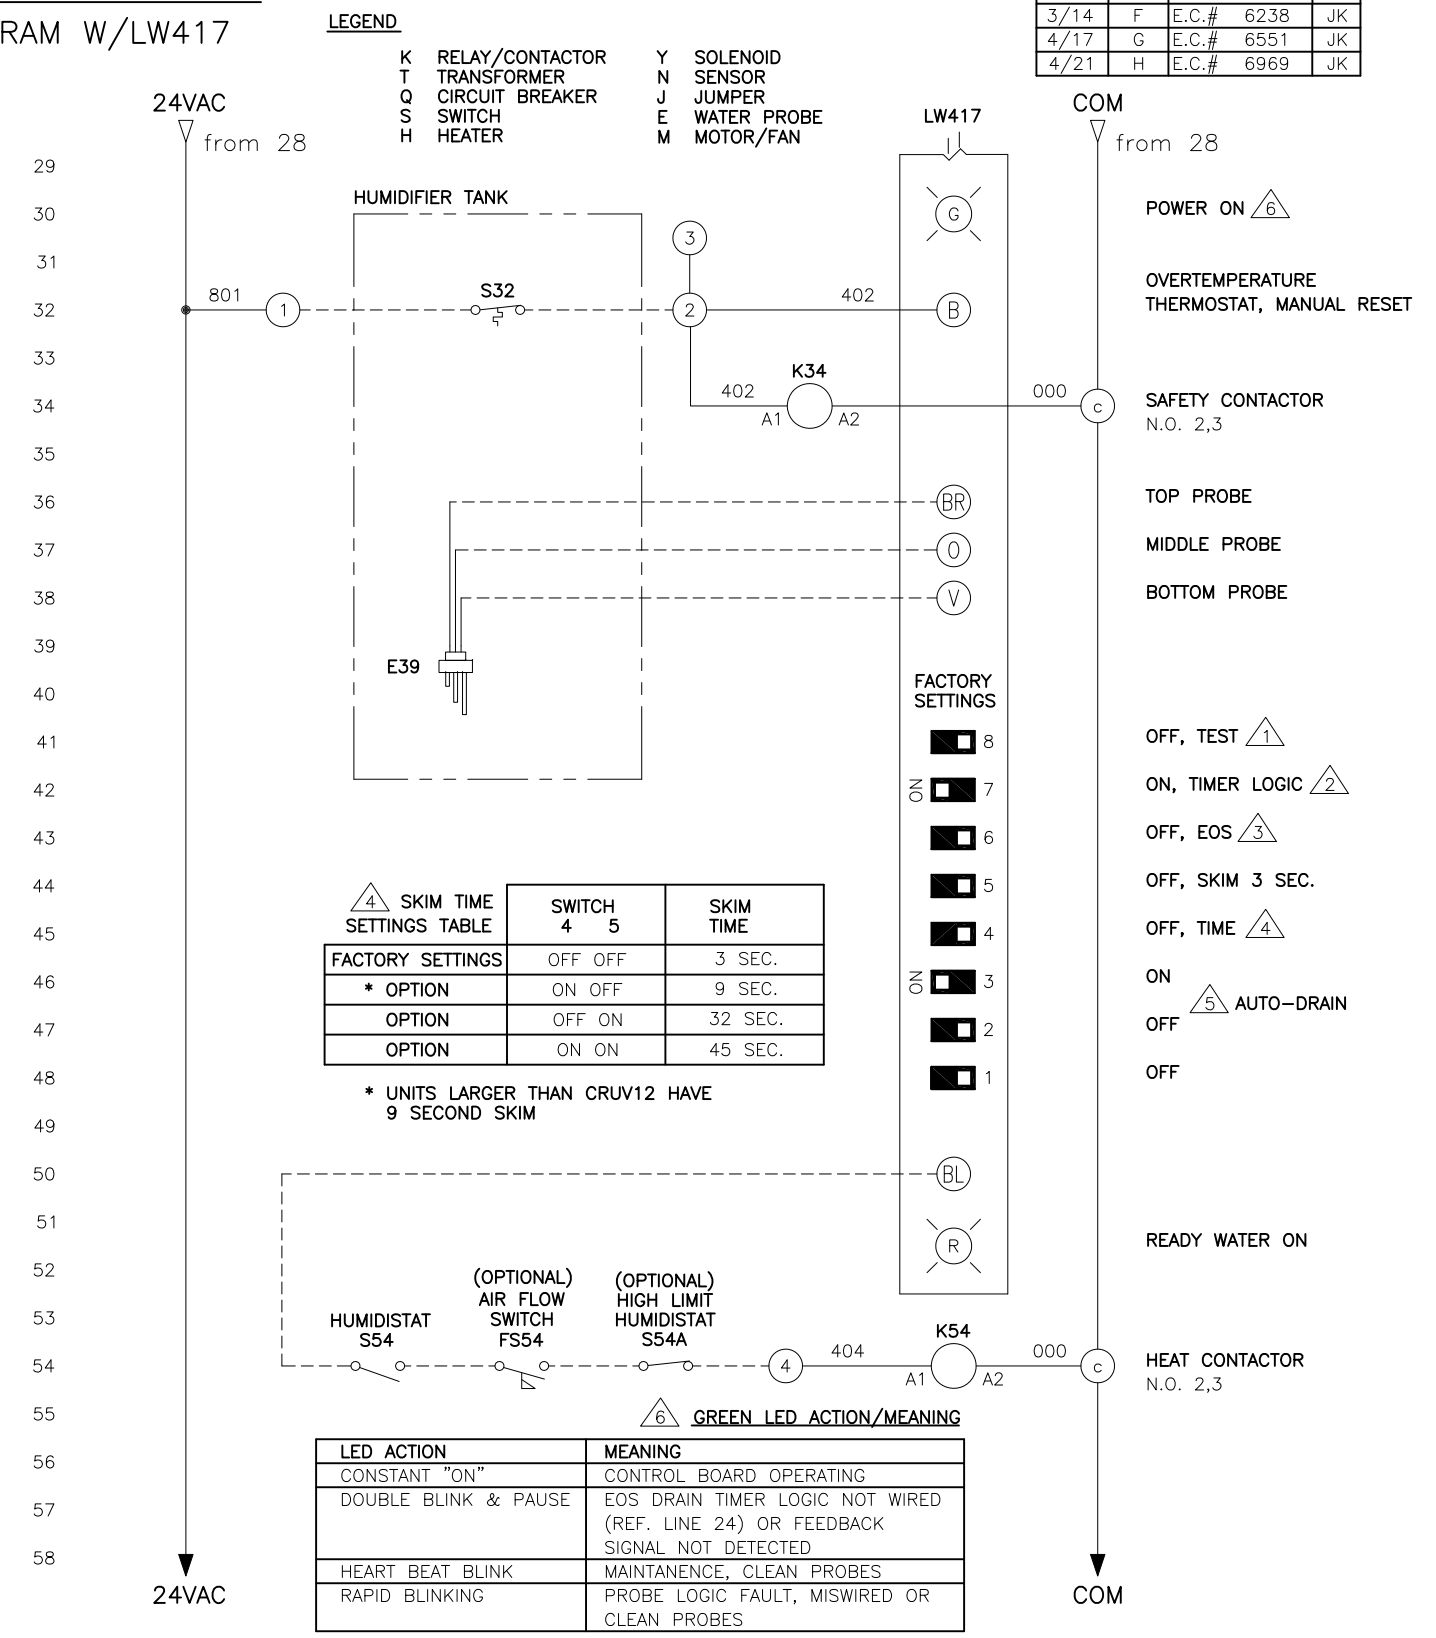

4 SKIM TIME SETTINGS TABLE

	SWITCH 4	SWITCH 5	SKIM TIME
FACTORY SETTINGS	OFF	OFF	3 SEC.
* OPTION	ON	OFF	9 SEC.
OPTION	OFF	ON	32 SEC.
OPTION	ON	ON	45 SEC.

* UNITS LARGER THAN CRUV12 HAVE 9 SECOND SKIM

POWER WIRING
CONTROL CIRCUIT WIRING
FIELD WIRING

CRUV, STANDARD WATER, ON/OFF CTRL 120 V. DIAGRAM
MAT'L:
SCALE:
DRAWN BY: KROG
DATE: 5/27/03
P/N
CR-LW417-2